


N 30
 D5655X1GB
 CANOPY HOOD
 SILVER METALLIC GREY
 53 CM WIDE



C

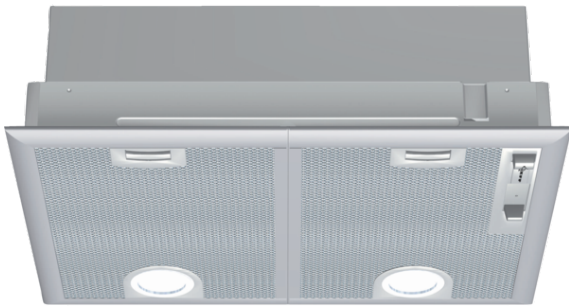

Canopy hood: designed to fit neatly under an overhead unit or cabinet. They're discreet and effectively use valuable space.

- ✓ LED lighting: a clear illumination whilst cooking thanks to the energy-saving LED lights
- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ High extraction rate: Ensures a clear view while cooking thanks to efficient motor technology as either a ducted or recirculating solution.

Features

Technical Data

Typology : Traditional
 Approval certificates : CE, VDE
 Length of electrical supply cord (cm) : 130
 Required niche size for installation (HxWxD) : 255mm x 500mm x 350mm
 Minimum distance above an electric hob : 650
 Minimum distance above a gas hob : 650
 Net weight (kg) : 7.439
 Type of control : mechanical
 Maximum output air extraction (m³/h) : 363
 Boost position output recirculating (m³/h) : 395
 Maximum output recirculating air (m³/h) : 268
 Boost position air extraction (m³/h) : 618
 Number of lights (Stck) : 2
 Noise level (dB(A) re 1 pW) : 56
 Diameter of air outlet (mm) : 150 / 120
 Grease filter material : Washable aluminium
 EAN code : 4242004237136
 Connection rating (W) : 206
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50
 Plug type : GB plug
 Installation type : Built-in

Optional accessories

Z5155X0 Accessories extractor hoods
 Z5552X0 Accessories extractor hoods



4 242004 237136

N 30
D5655X1GB
CANOPY HOOD
SILVER METALLIC GREY
53 CM WIDE

Features

Key performance features:

- Energy Efficiency Class: C (at a range of energy efficiency classes from A++ to E)*
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 360 m³/h
Intensive 590 m³/h
- Noise max. Normal Level: 56 dB*

Features

- Slide control operation
- 3 speeds plus intensive
- 2 x LED spot 2.15W (low volt)
- Colour Temperature: 3500 K
- 2 metal grease filter cassettes

Design

- For installation in a chimney or unit, above a hob
- Silver metallic grey
- Canopy hood
- Slide control operation
- Mechanical controls

Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction charcoal filter (accessory) needed
- Max. extraction rate: 590 m³/h
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 360 m³/h
Intensive 590 m³/h
- Noise max. Normal Level: 56 dB*
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
Max. normal use: 56 dB(A) re 1 pW (44 dB(A) re 20 µPa sound pressure)
Intensive: 68 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)
- Power rating: 206 W
- Light Intensity: 438 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe ø 150 mm (ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 255-255 x 530 x 380 mm
- Dimensions recirculating (HxWxD): 255-255 x 530 x 380 mm
- Mounting dimensions: width: 50 cm, depth: 35 cm
- Energy Efficiency Class: C (at a range of energy efficiency classes from A++ to E)*
- Blower Efficiency Class: D*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*
- Average Energy Consumption: 78.1 kWh/year*

Optional accessories

- Recirculating kit
- * In accordance with the EU-Regulation No 65/2014

N 30
 D5655X1GB
 CANOPY HOOD
 SILVER METALLIC GREY
 53 CM WIDE

Dimensioned drawings

