


N 90, Wall-mounted cooker hood, 90 cm, Stainless steel  
D96BMV5N5B



COOKING PASSION SINCE 1877



A<sup>+</sup>

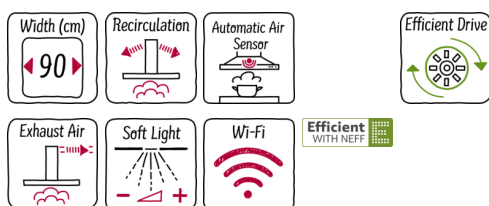

#### Optional accessories

Z50XP0X0	CleanAir act.carbon filter regenerative
Z5102X1	Active carbon filter
Z5102X5	Recirculating kit
Z5170X1	CleanAir active carbon filter spare part
Z51FXI0X5	Integrated CleanAir Recirculation Kit
Z51FXJ0X5	Integrated CleanAir Recirculation Kit
Z5276X0	CleanAir Recirculation Kit
Z5861N0	Back panel stainless steel
Z5895N0	Stainless steel back panel
Z5906N1	Chimney extension 1000 mm
Z5916N1	Chimney extension 1500 mm

The coordinating and stylish Neff box hood is modern in design and keeps up with your cooking.

- ✓ High extraction rate: Ensures a clear view while cooking thanks to efficient motor technology as either a ducted or recirculating solution.
- ✓ Special noise insulation: guarantees an extremely quiet cooking experience
- ✓ Sensor-controlled automatic system: focus on your cooking and keep the noise to a minimum thanks to the fully automatic hood control when the Wi-Fi compatible hob is switched on
- ✓ Hob-Hood Control: conveniently control the hood directly from the hob (with Wi-Fi enabled hob)
- ✓ Adjustable LED White Colour Temperature – easily adjust the light to the shade that's right for your kitchen

#### Features

##### Technical Data

Color chimney : Stainless steel  
 Typology : Chimney  
 Approval certificates : CE, VDE  
 Length of electrical supply cord (cm) : 130  
 Height of product, without chimney (mm) : 46  
 Minimum distance above an electric hob : 550  
 Minimum distance above a gas hob : 650  
 Net weight (kg) : 20.713  
 Type of control : Electronic  
 Number of speed settings : 3-stage + 2 intensive  
 Maximum output air extraction (m<sup>3</sup>/h) : 430  
 Boost position output recirculating (m<sup>3</sup>/h) : 385  
 Maximum output recirculating air (m<sup>3</sup>/h) : 311  
 Boost position air extraction (m<sup>3</sup>/h) : 843  
 Number of lights (Stck) : 3  
 Noise level (dB(A) re 1 pW) : 55  
 Diameter of air outlet (mm) : 150 / 120  
 Grease filter material : Washable stainless steel  
 EAN code : 4242004234944  
 Connection rating (W) : 169  
 Current (A) : 10  
 Voltage (V) : 220-240  
 Frequency (Hz) : 60; 50  
 Plug type : GB plug  
 Installation type : Wall-mounted



4 242004 234944

*N 90, Wall-mounted cooker hood, 90 cm, Stainless steel*  
*D96BMU5N5B*

## Features

### Key performance features:

- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A++ to E)\*
- Extraction rate according to EN 61591 ø 15 cm:  
max. Normal use 430 m³/h  
Intensive 843 m³/h
- Noise max. Normal Level: 55 dB\*

### Special features

- Climate Control Sensor
- Hob-Hood control (with Wi-Fi enabled hob)
- Remote Monitoring and Control for connected home appliances and operation via smartphone or tablet (only in countries where Home Connect service is available)
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Voice Control enabled via popular voice assistants (only in countries where this service is available)
- Adjustable color temperature (2.700 K - 5.000 K) for adaption to the room lighting available via Home Connect
- Fully automatic hood

### Features

- Touch control
- 3 power levels and 2 intensive settings
- 3 x 3W LED lights
- softLight with dimmer function
- Efficient BLDC-technology
- Interval operation
- Automatic after running (10 minutes)
- Automatic intensive revert (6mins)
- 3 metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- Noise reduction function
- Additional noise insulation
- easy to clean Inner frame

### Design

- Stainless steel
- Box design
- Chimney hood
- For wall mounted installation
- Touch control
- Electronic controls

### Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Extraction rate according to EN 61591 ø 15 cm:  
max. Normal use 430 m³/h  
Intensive 843 m³/h
- Extraction rate according to EN 61591 max. 430 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 55 dB(A) re 1 pW (42 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:  
Max. normal use: 55 dB(A) re 1 pW (42 dB(A) re 20 µPa sound pressure)  
Intensive: 69 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 55 dB (A) re 1pW
- Noise max. Normal Level: 55 dB\*
- Power rating: 169 W
- Light Intensity: 603 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 628-954 x 898 x 500 mm
- Dimensions recirculating (HxWxD): 628-1064 x 898 x 500 mm
- Dimensions recirculating with CleanAir module (HxWxD): 809-1139 x 898 x 500 mm
- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A++ to E)\*
- Blower Efficiency Class: A\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: B\*
- Average Energy Consumption: 33.1 kWh/year\*

### Optional accessories

- Recirculating kit Z5102X1, Z5102X5, Z5276X0, Z5906N1, Z5916N1

\* In accordance with the EU-Regulation No 65/2014

D96BMV5N5B

## Dimensioned drawings

