


**iQ100**  
**EH601FEB1E Induction Hob**  
**Flush fitting design/installation**  
**572 mm**

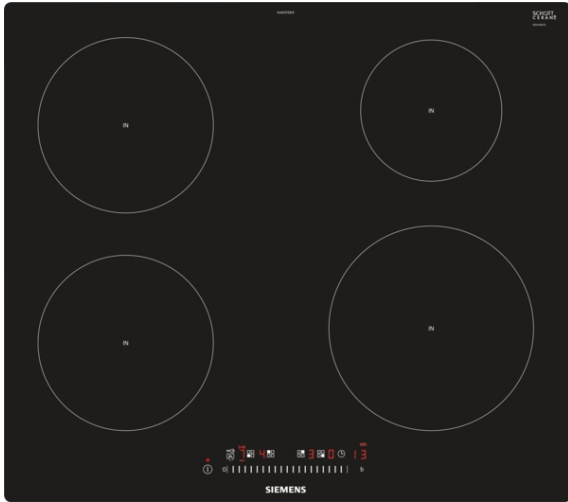

Induction cooktop with innovative features that enable highly flexible cooking in any situation.

- ✓ Innovative induction technology is one of the quickest, safest and most efficient methods of cooking.
- ✓ Shorter heating times with up to 50% more power thanks to the powerBoost function.
- ✓ The touchSlider allows the hob temperature to be controlled by entering it directly or by moving the slider with a single finger.

**Features**

**Technical Data**

Product name/family : Cooking zone ceramic  
 Construction type : Built-in  
 Energy input : Electric  
 Total number of positions that can be used at the same time : 4  
 Required niche size for installation (HxWxD) : 56 x 560-576 x 500-516  
 Width of the product (mm) : 572  
 Dimensions of the product (mm) : 56 x 572 x 512  
 Dimensions of the packed product (HxWxD) (mm) : 126 x 603 x 753  
 Net weight (kg) : 12.0  
 Gross weight (kg) : 13.0  
 Residual heat indicator : Separate  
 Location of control panel : Hob front  
 Basic surface material : Ceramic  
 Color of surface : Black  
 Approval certificates : AENOR, CE  
 Length of electrical supply cord (cm) : 110  
 EAN code : 4242003716045  
 Electrical connection rating (W) : 7400  
 Current (A) : 32; 2\*16  
 Voltage (V) : 220-240  
 Frequency (Hz) : 60; 50



**iQ100****EH601FEB1E Induction Hob****Flush fitting design/installation****572 mm****Features****Control:**

- touchSlider control

**Special features**

- 
- Ring zone
- 4 induction cooking zones
- reStart function
- Timer for all zones  
Acoustic signal
- 17 power levels
- Power boost setting
- Energy Consumption Display

**Safety Features**

- Automatic pan recognition  
Connection current management (20, 16, 13, 10 Amps options)  
Automatic safety switch off  
Control panel lock  
Control panel pause
- 2 stage residual heat indicators
- Main on/off switch

**Power and size:**

- Cooking zones: 1 x Ø 180 mm, 1.8 KW (max. Power levels 3.1 KW) Induction; 1 x Ø 180 mm, 1.8 KW (max. Power levels 3.1 KW) Induction; 1 x Ø 145 mm, 1.4 KW (max. Power levels 2.2 KW) Induction; 1 x Ø 210 mm, 2.2 KW (max. Power levels 3.7 KW) Induction

**Technical information**

- Installation measurements: 560 mmx500 mm
- Connection cable (1.1 M )
- Min. worktop thickness: 30 mm
- Connected load: 7.4 kW
- Cable included in packaging

iQ100  
EH601FEB1E Induction Hob  
Flush fitting design/installation  
572 mm

Dimensioned drawings

