


iQ700
EX879FVC1E Induction Hob
Stainless Steel side trim with bevelled front edge
812 mm

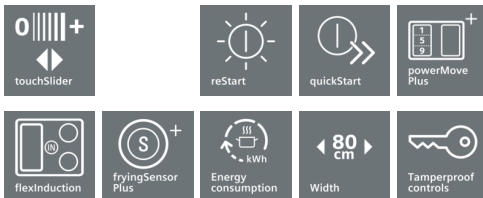

Induction cooktop with innovative features that enable highly flexible cooking in any situation.

- ✓ fryingSensor: maintains the desired pan temperature automatically after heating up to avoid scorching.
- ✓ Flexible cooking thanks to the innovative flexInduction cooking zone and 2 traditional cooking zones.
- ✓ The touchSlider allows the hob temperature to be controlled by entering it directly or by moving the slider with a single finger.

Features

Technical Data

Product name/family : Cooking zone ceramic
 Construction type : Built-in
 Energy input : Electric
 Total number of positions that can be used at the same time : 5
 Required niche size for installation (HxWxD) : 51 x 750-780 x 490-500
 Width of the product (mm) : 812
 Dimensions of the product (mm) : 51 x 812 x 520
 Dimensions of the packed product (HxWxD) (mm) : 126 x 953 x 603
 Net weight (kg) : 16.0
 Gross weight (kg) : 18.0
 Residual heat indicator : Separate
 Location of control panel : Hob front
 Basic surface material : Ceramic
 Color of surface : Alu, brushed, Stainless steel
 Color of frame : Alu, brushed
 Approval certificates : AENOR, CE
 Length of electrical supply cord (cm) : 110
 EAN code : 4242003717042
 Electrical connection rating (W) : 7400
 Current (A) : 32; 2*16
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60



Optional accessories

- HZ390230 System pan diameter 21cm
- HZ390011 Stainless Steel roaster with glas lid

iQ700
EX879FVC1E Induction Hob
Stainless Steel side trim with bevelled
front edge
812 mm

Features

Control:

- touchSlider control
- fryingSensor with 4 temperature settings

Special features

- flexInduction zone
- 5 induction cooking zones
- reStart function
- Timer for all zones
Acoustic signal
-
- 17 power levels
- Power boost setting
- Energy Consumption Display

Safety Features

- Automatic pan recognition
Connection current management (20, 16, 13, 10 Amps options)
Automatic safety switch off
Control panel lock
Control panel pause
- 2 stage residual heat indicators
- Main on/off switch

Power and size:

- Cooking zones: 1 x Ø 180 mm, 1.8 KW (max. Power levels 3.1 KW) Induction; 1 x Ø 145 mm, 1.4 KW (max. Power levels 2.2 KW) Induction; 1 x Ø 240 mm, 2.2 KW (max. Powerstufe 3.7 KW) Induktion; 1 x Ø 400 mmx210 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power levels 3.7 KW) Induction

Technical information

- Installation measurements: 750 mmx490 mm
- Connection cable (1.1 M)
- Min. worktop thickness: 30 mm
- Connected load: 7.4 kW
- Cable included in packaging

iQ700
EX879FVC1E Induction Hob
Stainless Steel side trim with bevelled
front edge
812 mm

Dimensioned drawings

