


**iQ300**  
**LB75565GB**  
**Canopy hood**  
**Silver metallic lacquer**  
**75 cm**

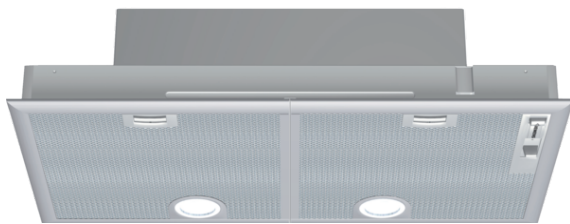

The powerful canopy cooker hood is concealed in a unit above the hob.

- ✓ The 610 m<sup>3</sup>/h extraction rate supplies clean air when cooking.
- ✓ The energy-saving LED lighting ensures optimal visibility when cooking.
- ✓ Great for banishing unwanted steam, grease and cooking smells the intensive setting temporarily increases the extraction rate.
- ✓ At 44 dB the hood is extremely quiet when being used.

### Features

#### Technical Data

Typology : Traditional  
 Approval certificates : CE, VDE  
 Length of electrical supply cord (cm) : 130  
 Required niche size for installation (HxWxD) : 255mm x 700mm x 350mm  
 Minimum distance above an electric hob : 650  
 Minimum distance above a gas hob : 650  
 Net weight (kg) : 9.409  
 Type of control : mechanical  
 Maximum output air extraction (m<sup>3</sup>/h) : 379  
 Boost position output recirculating (m<sup>3</sup>/h) : 408  
 Maximum output recirculating air (m<sup>3</sup>/h) : 278  
 Boost position air extraction (m<sup>3</sup>/h) : 638  
 Number of lights (Stck) : 2  
 Noise level (dB(A) re 1 pW) : 56  
 Diameter of air outlet (mm) : 120 / 150  
 Grease filter material : Washable aluminium  
 EAN code : 4242003838419  
 Connection rating (W) : 206  
 Voltage (V) : 220-240  
 Frequency (Hz) : 50  
 Plug type : GB plug  
 Installation type : Built-in

### Optional accessories

LZ73050 Charcoal odour filter



**iQ300**  
**LB75565GB**  
**Canopy hood**  
**Silver metallic lacquer**  
**75 cm**

#### Features

##### Key performance features:

- Energy Efficiency Class: C (at a range of energy efficiency classes from A++ to E)\*
- Max. extraction rate: 610 m<sup>3</sup>/h
- Noise max. Normal Level: 56 dB\*

##### Features

- Slider switch control for extractor speeds and light
- 3 x power levels plus intensive setting
- Twin motors
- 2 x LED spot 2.15W (low volt)
- Colour Temperature: 3500 K
- 2 x metal grease filter cassettes

##### Design

- For installation under an overhead canopy kitchen unit
- Canopy hood
- Mechanical

##### Performance/technical information

- Suitable for ducted and re-circulating operation
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed
- Max. extraction rate: 610 m<sup>3</sup>/h
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use 370 m<sup>3</sup>/h
- Intensive 610 m<sup>3</sup>/h
- Noise max. Normal Level: 56 dB\*
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
- Max. normal use: 56 dB(A) re 1 pW (44 dB(A) re 20 µPa sound pressure)
- Intensive: 68 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)
- Power rating: 206 W
- Light Intensity: 438 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 255-255 x 730 x 380 mm
- Dimensions recirculating, chimney (HxWxD): 255-255 x 730 x 380 mm
- built-in dimensions (HxWxD): 255 x 700 x 350 mm
- Energy Efficiency Class: C (at a range of energy efficiency classes from A++ to E)\*
- Blower Efficiency Class: D\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: C\*
- Average Energy Consumption: 79.5 kWh/year\*

##### Optional accessories

- Recirculating kit

\* In accordance with the EU-Regulation No 65/2014

iQ300  
LB75565GB  
Canopy hood  
Silver metallic lacquer  
75 cm

Dimensioned drawings

