


## iQ700, Wall-mounted cooker hood, 90 cm, Stainless steel LC91BUV50B



A+

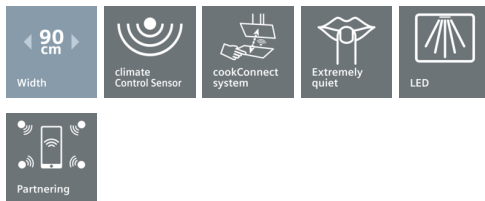

The wall mounted chimney hood features a very high extraction rate in a distinguished design that coordinates with a range of Siemens appliances, as well as your kitchen.

- ✓ Impressive extraction rate (964 m³/h) for efficient odour and steam removal.
- ✓ The power level and the light of your hood can be adjusted by your hob with the cookConnect system or via the Home Connect App.
- ✓ The climateControl Sensor monitors steam and odours and adjusts the power level automatically.
- ✓ LED lights: For optimal visibility and ambience when cooking.
- ✓ The hood is expertly designed to be extremely quiet when being used (64 db(A)).

### Features

#### Technical Data

Color chimney : Stainless steel  
 Typology : Chimney  
 Approval certificates : CE, VDE  
 Length of electrical supply cord (cm) : 130  
 Height of product, without chimney (mm) : 46  
 Minimum distance above an electric hob : 550  
 Minimum distance above a gas hob : 650  
 Net weight (kg) : 19.963  
 Type of control : Electronic  
 Number of speed settings : 3-stage + 2 intensive  
 Maximum output air extraction (m³/h) : 602  
 Boost position output recirculating (m³/h) : 428  
 Maximum output recirculating air (m³/h) : 362  
 Boost position air extraction (m³/h) : 964  
 Number of lights (Stck) : 3  
 Noise level (dB(A) re 1 pW) : 64  
 Diameter of air outlet (mm) : 150 / 120  
 Grease filter material : Washable stainless steel  
 EAN code : 4242003832011  
 Connection rating (W) : 265  
 Current (A) : 10  
 Voltage (V) : 220-240  
 Frequency (Hz) : 60; 50  
 Plug type : GB plug  
 Installation type : Wall-mounted

### Optional accessories

LZ57300	cleanAir Recirculation Kit
LZ56200	CleanAir active carbon filter spare part
LZ53451	Active carbon filter
LZ53450	Recirculating kit
LZ50961	Backboard 90 x 72 cm
LZ50960	Backboard 90x65cm
LZ12365	Chimney extension 1500 mm
LZ12265	Chimney extension 1000 mm
LZ10FXJ05	Integrated CleanAir Recirculation Kit
LZ10FXI05	Integrated CleanAir Recirculation Kit
LZ00XP00	CleanAir act.carbon filter regenerative



## iQ700, Wall-mounted cooker hood, 90 cm, Stainless steel LC91BUV50B

### Features

#### Key performance features:

- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A++ to E)\*
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use 601 m³/h
- Intensive 964 m³/h
- Noise max. Normal Level: 64 dB\*

#### Home Connect: Remote Monitoring and Control (only in countries where Home Connect service is available)

- Home Connect: Remote Monitoring and Control for connected home appliances and operation via smartphone or tablet (only in countries where Home Connect service is available)
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Voice Control enabled via popular voice assistants (only in countries where this service is available)
- Interval function: available via Home Connect
- Silence function: available via Home Connect

#### Features

- climateControl sensor
- cookConnect hob based hood control
- touchControl with 7-segment display
- softLight with dimmer function
- 3 x 1.5W LED
- Fully automatic hood
- 3 power levels and 2 intensive settings
- Efficient BLDC motor
- Twin channel high performance fan motor
- Automatic after running (10 minutes)
- Automatic intensive revert (6mins)
- Steel filter cover
- 3 x metal grease filter cassettes - dishwasher safe
- Grease and charcoal filter saturation indicators
- Additional noise reduction insulation

#### Design

- 90 cm
- Chimney hood
- Stainless Steel
- For wall mounted installation
- Electronic control

#### Performance/technical information

- Suitable for ducted and re-circulating operation
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed
- Max. extraction rate: 964 m³/h
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use 601 m³/h
- Intensive 964 m³/h
- Extraction rate in recirculation mode:
- Max. normal use: 362 m³/h
- Intensive: 428 m³/h
- Noise max. Normal Level: 64 dB\*
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:

- Max. normal use: 64 dB(A) re 1 pW (51 dB(A) re 20 µPa sound pressure)
- Intensive: 73 dB(A) re 1 pW (60 dB(A) re 20 µPa sound pressure)
- Noise levels in recirculation mode:
- Max. normal use: 73 dB(A) re 1 pW (60 dB(A) re 20 µPa sound pressure)
- Intensive: 76 dB(A) re 1 pW (63 dB(A) re 20 µPa sound pressure)
- Power rating: 265 W
- Light Intensity: 373 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 628-954 x 898 x 500 mm
- Dimensions recirculating, chimney (HxWxD): 628-1064 x 898 x 500 mm
- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A++ to E)\*
- Blower Efficiency Class: A\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: B\*
- Average Energy Consumption: 33.9 kWh/year\*

#### Optional accessories

- Recirculating kit

\* In accordance with the EU-Regulation No 65/2014

**iQ700, Wall-mounted cooker hood, 90  
cm, Stainless steel  
LC91BUV50B**

## Dimensioned drawings

