


**iQ700**  
**LC91KWW60B**  
**Angled design**  
**Chimney hood**  
**Black**  
**90 cm**

**A+**

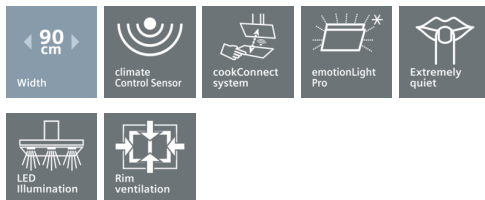

Angled extractor hood with outstanding design and high extraction rate for a powerful performance.

- ✓ Brushless motor: powerful and quiet extraction of steam.
- ✓ cookConnect System: Control your extractor hood directly from your Cooktop (with matching cooktop).
- ✓ The climateControl Sensor monitors steam and odours and adjusts the power level automatically.
- ✓ emotionLight Pro: Adapt your extractor hood to your style.
- ✓ Home Connect: Remote access to a selection of features of your extractor hood via smartphone or tablet. (only in countries where Home Connect service is available).

### Features

#### Technical Data

Color chimney : Stainless steel  
 Typology : Chimney  
 Approval certificates : CE, G-Mark, VDE  
 Length of electrical supply cord (cm) : 130  
 Height of product, without chimney (mm) : 323  
 Minimum distance above an electric hob : 450  
 Minimum distance above a gas hob : 600  
 Net weight (kg) : 22.0  
 Type of control : Electronic  
 Number of speed settings : 3-stage + 2 intensive  
 Maximum output air extraction (m<sup>3</sup>/h) : 530  
 Boost position output recirculating (m<sup>3</sup>/h) : 630  
 Maximum output recirculating air (m<sup>3</sup>/h) : 450  
 Boost position air extraction (m<sup>3</sup>/h) : 950  
 Number of lights (Stck) : 2  
 Noise level (dB(A) re 1 pW) : 56  
 Diameter of air outlet (mm) : 150 / 120  
 Grease filter material : Washable aluminium  
 EAN code : 4242003761113  
 Connection rating (W) : 270  
 Current (A) : 10  
 Voltage (V) : 220-240  
 Frequency (Hz) : 50; 60  
 Plug type : GB plug  
 Installation type : Wall-mounted



### Optional accessories

LZ56200 : CleanAir active carbon filter spare part , LZ10AXL50 : Chimney extension 1500 mm , LZ10AXK50 : Chimney extension 1000 mm , LZ10AKU00 : Recirculation kit , LZ10AKT00 : Recirculation kit for chimless use , LZ10AKS00 : Recirculation kit regenerative , LZ10AKR00 : Recirculation kit regenerative chimless , LZ10AKA00 : Active carbon filter (spare part) , LZ00XXP00 : CleanAir act.carbon filter regenerative

**iQ700**  
**LC91KWW60B**  
**Angled design**  
**Chimney hood**  
**Black**  
**90 cm**

#### Features

##### Key performance features:

- Energy Efficiency Class: A+\*
- Extraction rate according to EN 61591 ø 15 cm:  
max. Normal use 530 m³/h  
Intensive 950 m³/h
- Noise max. Normal Level: 56 dB\*

##### Features

- climateControl sensor
- emotionLight pro: Ambient light
- Boost function
- cookConnect hob based hood control (with Wi-Fi enabled hob)
- Home Connect: Remote Monitoring and Control (only in countries where Home Connect service is available)
- 3 power levels and 2 intensive settings
- softLight with dimmer function
- softLight with dimmer function
- 2 x 3W LED
- Colour Temperature: 3500 K
- Efficient BLDC motor
- Twin channel high performance fan motor
- Automatic after running (10 minutes)
- Automatic intensive revert (6mins)
- 2 x metal grease filter cassettes
- Grease and charcoal filter saturation indicators
- easy to clean Inner frame
- For wall mounted installation
- Rim ventilation

##### Design

- Black glass

##### Angled design

- Chimney hood
- Touch control for extractor speeds and light
- Electronic control

##### Performance/technical information

- Suitable for ducted and re-circulating operation
- In recirculation operation chimless use possible
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed
- Easy installation system
- Max. extraction rate: 950 m³/h
- Extraction rate according to EN 61591 ø 15 cm:  
max. Normal use 530 m³/h  
Intensive 950 m³/h
- Extraction rate in recirculation mode:  
Max. normal use: 450 m³/h  
Intensive: 630 m³/h
- Noise max. Normal Level: 56 dB\*
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:  
Max. normal use: 56 dB(A) re 1 pW (42 dB(A) re 20 µPa sound pressure)  
Intensive: 69 dB(A) re 1 pW (55 dB(A) re 20 µPa sound pressure)
- Noise levels in recirculation mode:  
Max. normal use: 69 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)  
Intensive: 78 dB(A) re 1 pW (64 dB(A) re 20 µPa sound pressure)
- Power rating: 270 W
- Light Intensity: 460 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 930-1200 x 890 x 499 mm
- Dimensions recirculating, chimney (HxWxD): 990-1260 x 890 x 499 mm
- Dimensions recirculating, chimless (HxWxD): 454 mm x 890 x 499 mm
- Dimensions recirculating with CleanAir module (HxWxD):  
1120 x 890 x 499 mm - mounting with outer chimney  
1190-1460 x 890 x 499 mm - mounting with telescopic chimney
- Energy Efficiency Class: A+\*
- Blower Efficiency Class: A\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: B\*
- Average Energy Consumption: 30.1 kWh/year\*

##### Optional accessories

- Recirculating kit

\* In accordance with the EU-Regulation No 65/2014

iQ700  
 LC91KWW60B  
 Angled design  
 Chimney hood  
 Black  
 90 cm

Dimensioned drawings

