


iQ700, Island cooker hood, 90 cm, Stainless steel LF91BUV50B



A+

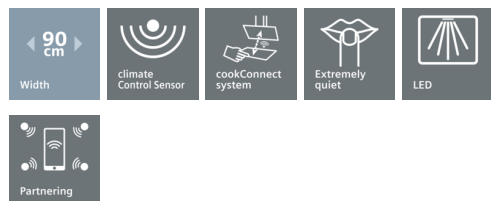

The island hood features a very high extraction rate in a distinguished design that coordinates with a range of Siemens appliances, as well as your kitchen.

- ✓ Impressive extraction rate (980 m³/h) for efficient odour and steam removal.
- ✓ The power level and the light of your hood can be adjusted by your hob with the cookConnect system or via the Home Connect App.
- ✓ The climateControl Sensor monitors steam and odours and adjusts the power level automatically.
- ✓ LED lights: For optimal visibility and ambience when cooking.
- ✓ The hood is expertly designed to be extremely quiet when being used (62 db(A)).

Features

Technical Data

Color chimney : Stainless steel
 Typology : Chimney
 Approval certificates : CE, VDE
 Length of electrical supply cord (cm) : 130
 Height of the chimney (mm) : 698-878/698-998
 Height of product, without chimney (mm) : 46
 Minimum distance above an electric hob : 550
 Minimum distance above a gas hob : 650
 Net weight (kg) : 31.557
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction (m³/h) : 598
 Boost position output recirculating (m³/h) : 427
 Maximum output recirculating air (m³/h) : 359
 Boost position air extraction (m³/h) : 980
 Number of lights (Stck) : 4
 Noise level (dB(A) re 1 pW) : 62
 Diameter of air outlet (mm) : 120 / 150
 Grease filter material : Washable stainless steel
 EAN code : 4242003832073
 Connection rating (W) : 266
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 60; 50
 Plug type : GB plug
 Installation type : Island



Optional accessories

LZ57600	cleanAir Recirculation Kit
LZ56200	CleanAir active carbon filter spare part
LZ53850	Recirculating kit
LZ53451	Active carbon filter
LZ12530	Extension for mounting kit 1000 mm
LZ12510	Extension for mounting kit 500 mm
LZ12410	Adapter for roof inclination front/back
LZ12385	Chimney extension 1600 mm
LZ12310	Adapter for roof inclination left/right
LZ12285	Chimney extension 1100 mm
LZ00XP00	CleanAir act.carbon filter regenerative

iQ700, Island cooker hood, 90 cm, Stainless steel LF91BUV50B

Features

Key performance features:

- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A++ to E)*
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use 597 m³/h
- Intensive 980 m³/h
- Noise max. Normal Level: 62 dB*

Home Connect: Remote Monitoring and Control (only in countries where Home Connect service is available)

- Home Connect: Remote Monitoring and Control for connected home appliances and operation via smartphone or tablet (only in countries where Home Connect service is available)
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Voice Control enabled via popular voice assistants (only in countries where this service is available)
- Interval function: available via Home Connect
- Silence function: available via Home Connect

Features

- climateControl sensor
- cookConnect hob based hood control
- touchControl with 7-segment display
- softLight with dimmer function
- 4 x 1.5W LED
- Fully automatic hood
- 3 power levels and 2 intensive settings
- Efficient BLDC motor
- Twin channel high performance fan motor
- Automatic after running (10 minutes)
- Automatic intensive revert (6mins)
- Steel filter cover
- 3 x metal grease filter cassettes - dishwasher safe
- Grease and charcoal filter saturation indicators
- Additional noise reduction insulation

Design

- 90 cm
- Stainless Steel
- For ceiling mounted installation
- Electronic control

Performance/technical information

- Suitable for ducted and re-circulating operation
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed
- Max. extraction rate: 980 m³/h
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use 597 m³/h
- Intensive 980 m³/h
- Extraction rate in recirculation mode:
- Max. normal use: 359 m³/h
- Intensive: 427 m³/h
- Noise max. Normal Level: 62 dB*
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:

- Max. normal use: 62 dB(A) re 1 pW (49 dB(A) re 20 µPa sound pressure)
- Intensive: 73 dB(A) re 1 pW (60 dB(A) re 20 µPa sound pressure)
- Noise levels in recirculation mode:
- Max. normal use: 72 dB(A) re 1 pW (59 dB(A) re 20 µPa sound pressure)
- Intensive: 76 dB(A) re 1 pW (63 dB(A) re 20 µPa sound pressure)
- Power rating: 266 W
- Light Intensity: 411 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 744-924 x 898 x 600 mm
- Dimensions recirculating, chimney (HxWxD): 744-1044 x 898 x 600 mm
- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A++ to E)*
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 36.8 kWh/year*

Optional accessories

- Recirculating kit

* In accordance with the EU-Regulation No 65/2014

**iQ700, Island cooker hood, 90 cm,
Stainless steel
LF91BUV50B**

Dimensioned drawings

