


PIB375FB1E Profile trim (front facette with side trim) 306 mm





The Induction hob: Faster than gas and ceramic hobs, induction is easier to clean and more energy efficient.

- **DirectSelect:** Direct, simple selection of the desired cooking zone, power and additional functions.
- **Induction:** Fast, precise cooking, easy cleaning and low energy consumption.
- **ComfortProfil:** Elegant, appealing design with bevelled front and metal strips on the side.
- **PowerBoost:** Up to 50% more power for faster heating.
- **Timer with switch-off function:** Turns off the assigned cooking zone after the set time.

Technical Data

	Vario/Domino cooking zone cera CONSTR_TYPE.Built-in Electric an be used at the same time : 2					
Required niche size for installation (HxWxD) :						
	51 x 270 x 490-500					
Width of the product (mm) :	306					
Dimensions of the product (mr	m): 51 x 306 x 527					
Dimensions of the packed product (HxWxD) (mm) :						
	110 x 370 x 573					
Net weight (kg) :	7.0					
Gross weight (kg) :	7.0					
Residual heat indicator :	Separate					
Location of control panel :	Hob front					
Basic surface material :	Ceramic					
Color of surface :	Alu, brushed, Black					
Color of frame :	Alu, brushed					
Approval certificates :	AENOR, CE					
Length of electrical supply cor	d (cm) : 110					
EAN code :	4242002848631					
Electrical connection rating (W	/): 3700					
Current (A) :	16					
Voltage (V) :	220-240					
Frequency (Hz) :	50; 60					





PIB375FB1E

Profile trim (front facette with side trim) 306 mm

The Induction hob: Faster than gas and ceramic hobs, induction is easier to clean and more energy efficient.

Design

- Profile trim (front facette with side trim)

Special features

- 2 induction cooking zones
- DirectSelect touch control
- Digital display
- Variable 17-stage power settings for each zone
- Timer for all zones Timer - shows how long the cooktop is in use Count up timer per cooktop
- HighSpeed ceramic glass
- Automatic pan recognition sensor Power management options for 16A, 13A or 10A connection Automatic safety shut off Control panel lock
- QuickStart function
- ReStart function
- Energy consumption display
- Cable included
- Connection cable (1.1 M)
- Connected load: 3.7 kW

Power and size:

- Cooking Zones: 1 x Ø 145 mm, 1.4 KW (max. Power levels 2.2 KW) Induction; 1 x Ø 210 mm, 2.2 KW (max. Power levels 3.7 KW) Induction
- Min. worktop thickness: 30 mm

Safety Features

- 2 stage residual heat indicator for each zone
- Main on/off switch


Quickness:

- PowerBoost function for all zones



PIB375FB1E

Profile trim (front facette with side trim) 306 mm

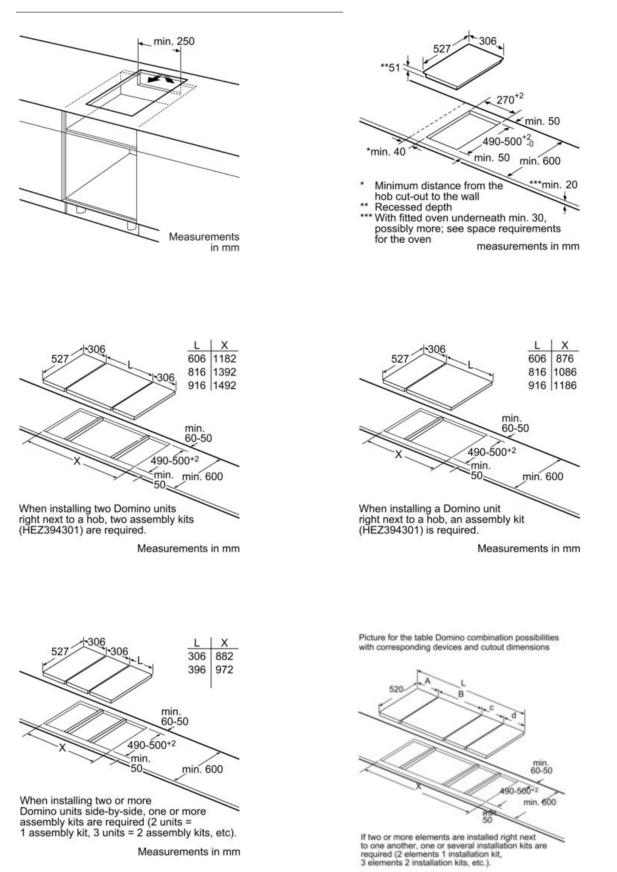


Cutout dimension (X) depending on the combination




PIB375FB1E

Profile trim (front facette with side trim) 306 mm




Measurements in mm



① Ventilation gap must be present.

Measurements in mm



Domino combination possibilities with corresponding device and cutout dimension

	AB	CD	LX		i	
2x30		306		-	612	576
1x30, 1x40	306	396			702	666
1x30, 1x60	306	606		-	912	876
1x30, 1x70	306	710	-	-	1016	980
1x30, 1x80	306	816	-		1122	1086
1x30, 1x90	306	916	-	-	1222	1186
2x40	396	396			792	756
1x40, 1x60	396	606	-	-	1002	966
1x40, 1x70	396	710			1106	1070
1x40, 1x80	396	816	-	-	1212	1176
1x40, 1x90	396	916		1.00	1312	1276
3x30	306	306	306		918	882
2x30, 1x40	306	306	396		1008	972
2x30, 1x60	306	306	606	-	1218	1182
2x30, 1x70	306	306	710	1.41	1322	1286
2x30, 1x80	306	306	816		1428	1392
2x30, 1x90	306	305	916		1528	1492
1x30, 2x40	306	396	396	-	1098	1062
1x30, 1x40, 1x60	306	396	606	1000	1308	1272
1x30, 1x40, 1x70	306	396	710	-	1412	1376
1x30, 1x40, 1x80	306	396	816	1.4	1518	1482
1x30, 1x40, 1x90	306	396	916	+	1618	1582
2x40, 1x60	396	396	605		1398	1362
4x30				306		
3x30, 1x40	306	306	306	396	1314	

Measurements in mm