


T59TF6RNO INDUCTION HOB
 CERAMIC GLASS ON STAINLESS STEEL TRIM
 918 MM

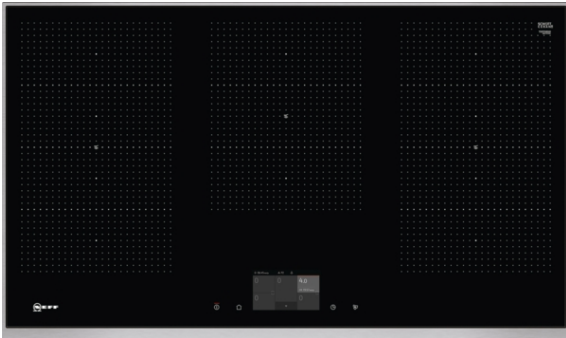

FlexInduction Hob with TFT touch-display.

- ✓ FlexInduction - The FlexZone lets you place your pots and pans anywhere you want and heats them exactly where they stand.
- ✓ FryingSensor - The FryingSensor with 5 selectable temperature settings monitors the set temperature and holds it steady. So there's no more burning.
- ✓ PowerMove - The FlexZone is divided into three heating zones: boiling in front, simmering in the middle and warming in the rear.
- ✓ Induction - With induction cooking, the heat is generated directly in the cookware for precise cooking that stops when power is off.
- ✓ PanBoost - Optimised power level function for more flexible and even faster heating.
- ✓ Cooktop-based hood control: convenient operation of the hood via your hob (with matching hood)

Features

Technical Data

Product name/family : Cooking zone ceramic
 Construction type : Built-in
 Energy input : Electric
 Total number of positions that can be used at the same time : 5
 Required niche size for installation (HxWxD) : 51 x 880-880 x 490-500
 Width of the product (mm) : 918
 Dimensions of the product (mm) : 51 x 918 x 546
 Dimensions of the packed product (HxWxD) (mm) : 126 x 603 x 1073
 Net weight (kg) : 18.0
 Gross weight (kg) : 20.0
 Residual heat indicator : Separate
 Location of control panel : Hob front
 Basic surface material : Ceramic
 Color of surface : Black, Stainless steel
 Color of frame : Stainless steel
 Approval certificates : AENOR, CE
 Length of electrical supply cord (cm) : 110
 EAN code : 4242004211464
 Electrical connection rating (W) : 11100
 Current (A) : 3*16
 Voltage (V) : 220-240
 Frequency (Hz) : 60; 50



Optional accessories

- Z9410X1 Stainless Steel roaster with glas lid
- Z9415X1 Steaming Rack for Stainless Steel roaste
- Z9416X2 Griddle Plate
- Z9417X2 Teppan Yaki (large)

T59TF6RNO INDUCTION HOB

CERAMIC GLASS ON STAINLESS STEEL TRIM

918 MM

Features

Control

- FullTouch TFT Display
- Dish categories - Use TFT Control to assist in cooking dishes to perfection
- Frying Sensor:5 frying levels
- Hob-Hood Control (with Wi-Fi enabled cooker hood)

Flexibility

- 3 Flex Induction zones
- 5 zone induction hob
- PowerTransfer

Special features

- Boost setting for all zones
- PanBoost
- Variable 17-stage power settings for each zone
-
- 2 stage residual heat indicators
- Timer with automatic shut off for all zones
 - LED timer for each zone with switch off function and acoustic signal
 - Count up timer
- ReStart function
- Automatic pan recognition
 - 4.6kW power output (20A); current management options for 16A, 13A or 10A connection
 - Safety cut out facility
 - Control panel lock
 - Control panel suspension
- Keep warm function
- Energy consumption display

Technical information

- Cooking zones: 1 x Ø 400 mmx240 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 240 mm, 2.2 KW (max. Powerlevels 3.7 KW) Induction; 1 x Ø 300 mmx240 mm, 2.6 KW (max. Power levels 3.7 KW) Induction; 1 x Ø 400 mmx240 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power levels 3.7 KW) Induction
- Measurement: (H/B/T) 51 x 918 x 546 mm
- Installation dimensions: (ID/W/D) 51 mm x 880 mm x 490 mm
- 90 cm width
- Length wire connection: 110 cm
- Main switch
- Min. worktop thickness: 30 mm
- Output 11100 W
- Cable included in packaging

T59TF6RNO INDUCTION HOB
 CERAMIC GLASS ON STAINLESS STEEL TRIM
 918 MM

Dimensioned drawings

