


T68TF6RNO INDUCTION HOB
CERAMIC GLASS ON STAINLESS STEEL TRIM
826 MM



COOKING PASSION SINCE 1877

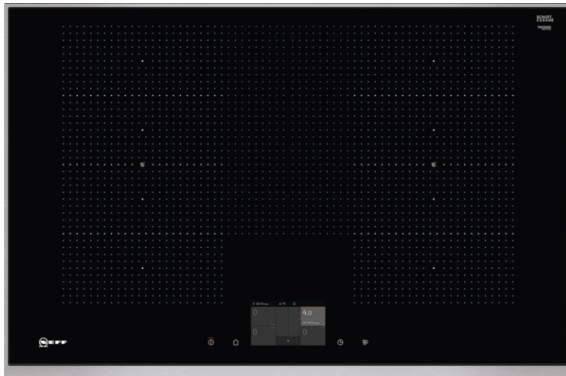

FlexInduction Hob with TFT touch-display.

- ✓ FlexInduction - The FlexZone lets you place your pots and pans anywhere you want and heats them exactly where they stand.
- ✓ Extended FlexZone for even greater flexibility. Perfect for bigger pots and roaster.
- ✓ FryingSensor - The FryingSensor with 5 selectable temperature settings monitors the set temperature and holds it steady. So there's no more burning.
- ✓ PowerMove - The FlexZone is divided into three heating zones: boiling in front, simmering in the middle and warming in the rear.
- ✓ Induction - With induction cooking, the heat is generated directly in the cookware for precise cooking that stops when power is off.
- ✓ PanBoost - Optimised power level function for more flexible and even faster heating.
- ✓ PowerTransfer - When you reposition a pot on the FlexZone, your settings automatically transfer
- ✓ Cooktop-based hood control: convenient operation of the hood via your hob (with matching hood)

Features

Technical Data

Product name/family : Cooking zone ceramic
Construction type : Built-in
Energy input : Electric
Total number of positions that can be used at the same time : 4
Required niche size for installation (HxWxD) : 51 x 750-780 x 490-500
Width of the product (mm) : 826
Dimensions of the product (mm) : 51 x 826 x 546
Dimensions of the packed product (HxWxD) (mm) : 130 x 600 x 950
Net weight (kg) : 15.0
Gross weight (kg) : 17.0
Residual heat indicator : Separate
Location of control panel : Hob front
Basic surface material : Ceramic
Color of surface : Black, Stainless steel
Color of frame : Stainless steel
Approval certificates : AENOR, CE
Length of electrical supply cord (cm) : 110
EAN code : 4242004211426
Electrical connection rating (W) : 7400
Current (A) : 32; 2*16
Voltage (V) : 220-240
Frequency (Hz) : 50; 60

Included accessories

1 x adjustment strip 750 - 780 mm



4 242004 211426

Optional accessories

Z9410X1	Stainless Steel roaster with glas lid
Z9415X1	Steaming Rack for Stainless Steel roaste
Z9416X2	Griddle Plate
Z9417X2	Teppan Yaki (large)

T68TF6RNO INDUCTION HOB

CERAMIC GLASS ON STAINLESS STEEL TRIM

826 MM

Features

Control

- FullTouch TFT Display
- Dish categories - Use TFT Control to assist in cooking dishes to perfection
- Frying Sensor:5 frying levels
- Hob-Hood Control (with Wi-Fi enabled cooker hood)

Flexibility

- 2 Flex Induction Zones with extended flex
- 4 zone induction hob
- PowerTransfer

Special features

- Boost setting for all zones
- PanBoost
- Variable 17-stage power settings for each zone
-
- 2 stage residual heat indicators
- Timer with automatic shut off for all zones
LED timer for each zone with switch off function and acoustic signal
Count up timer
- ReStart function
- Automatic pan recognition
4.6kW power output (20A); current management options for 16A, 13A or 10A connection
Safety cut out facility
Control panel lock
Control panel suspension
- Keep warm function
- Energy consumption display

Technical information

- Cooking zones: 1 x Ø 400 mmx230 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power levels 3.7 KW) Induction; 1 x Ø 400 mmx230 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power levels 3.7 KW) Induction
- Measurement: (H/B/T) 51 x 826 x 546 mm
- Installation dimensions: (ID/W/D) 51 mm x 750 mm x 490 mm
- 80 cm width
- Length wire connection: 110 cm
- Main switch
- Min. worktop thickness: 30 mm
- Output 7400 W
- Cable included in packaging

T68TF6RNO INDUCTION HOB
CERAMIC GLASS ON STAINLESS STEEL TRIM
826 MM

Dimensioned drawings

