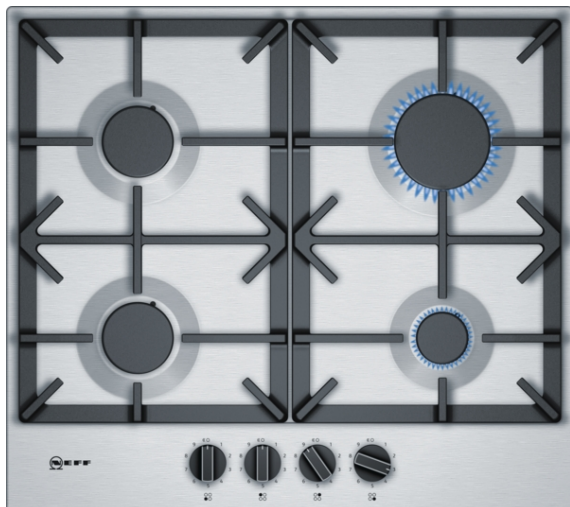*T26DS49N0*
60 CM, HOB, STAINLESS STEEL

NEFF

COOKING PASSION SINCE 1877

The gas hob with a stainless-steel surface design and adjustable FlameSelect.

√ FlameSelect - Thanks to the clever control of gas flow, the flame can be precisely adjusted in 9 steps. Always the same reliable and precise power levels for outstanding cooking convenience.

√ Continuous cast-iron pan supports for maximum stability and cooking convenience.

√ Design co-ordinated control dials - easy to operate in an attractive design.

Features

Technical Data

Product name/family : gas hob w integrated controls
Construction type : Built-in
Energy input : Gas
Total number of positions that can be used at the same time : 4
Required niche size for installation (HxWxD) : 45 x 560-562 x 480-492
Width of the product (mm) : 582
Dimensions of the product (mm) : 45 x 582 x 520
Dimensions of the packed product (HxWxD) (mm) : 138 x 650 x 585
Net weight (kg) : 10.0
Gross weight (kg) : 11.0
Residual heat indicator : without
Location of control panel : Hob front
Basic surface material : Stainless steel
Color of surface : Stainless steel
Color of frame : Stainless steel
Approval certificates : CE
Length of electrical supply cord (cm) : 100
EAN code : 4242004203384
Electrical connection rating (W) : 1
Gas connection rating (W) : 7500
Current (A) : 3
Voltage (V) : 220-240
Frequency (Hz) : 60; 50

4 242004 203384

Features

Design

• Stainless steel

Special features

• FlameSelect with 9 steps
• Design co-ordinated control dials
• Ignition via control dials
• black cast iron pan supports with protective rubber feet

Power and size:

• 4 burner hob
• 4 gas
• Left rear: Standard burner 1.75 KW
• Right rear: High speed burner 3 KW
• Left front: Standard burner 1.75 KW
• Right front: Economy burner 1 KW

Safety Features

• Flame failure safety device
• Factory set for connection to mains gas

Technical information

• Power cord length 100 cm

Accessories

• LPG jets (28-30/37mbar) included

T26DS49N0
60 CM, HOB, STAINLESS STEEL

520   582   53
45   26
56   19-29
560$^{+2}_{-0}$
*min. 50
*min. 100   480-490$^{+2}_{-0}$
min. 600
***min. 30

*   Minimum distance from
     the hob cut-out to the wall
** Position of gas connection in the cut-out
*** With fitted oven underneath, possibly more;
     see space requirements for the oven

measurements in mm

3/3